

CHAMPION®

原廠 優質一站式服務

洗碗碟機專家

The Dishwasher Experts

CHAMPION®

單缸運輸帶式洗碗碟機  
Single Tank Conveyor Type Dishwasher

AS-44B

商用節能型

Energy Saving

CHAMPION

卓越服務 Excellent Service

如欲索取有關資料,請與我們聯絡  
For more information, please contact us or your local dealer

卓滙機械香港有限公司  
Champion Machinery (HK) Ltd.

卓滙化工有限公司  
Champion Chemicals Ltd.


Tel : 852 - 2475 9875

Fax : 852 - 2443 1096

Email : sales@champion-chem.com

Website : www.champion-chem.com

優質配件  
Quality spare parts



Mechanical · Environmental · Professional




節約能源  
Energy Saving



自設國際規模廠房  
Original Manufactory



客戶培訓  
Training



洗碗房顧問服務  
Consultant Service



維修及零件中心  
Maintenance & Parts Centre



單缸運輸帶式洗碗碟機  
Single Tank Conveyor Type Dishwasher  
AS-44B




單缸運輸帶式洗碗碟機  
Single Tank Conveyor Type Dishwasher  
AS-44B

商用節能型  
Energy Saving

洗碗碟機專家  
The Dishwasher Experts



最新「船形開關」；簡易全自動機械化控制功能。  
Latest "Boat-shaped selector switches"; fully automatic mechanical operation.




採用內凹式噴孔設計，防堵塞，加強清洗能力和擴寬噴洗範圍。  
Debossed anti-clog nozzles provide powerful washing performance.



重工齒輪式馬達傳送系統，進防障礙和過荷保護。  
Heavy duty gear box conveyor system with jam and overload protection.



Excellent Design 卓越設計功能



機頂式控制箱及熱水爐設計，方便操作和維修。  
Top mounted control panel & booster for convenient operation and easy maintenance.






自動節能時間操控及準確的恆溫系統。  
Energy saving auto timer activates & accurate thermostat control.



採用ABB合金強勁水泵摩打，並配合耐用的不銹鋼車葉。  
ABB pump motor & alloy impeller guarantee maximum durability.

Technical Data 技術規格

最大洗滌量	Machine capacity	225 篩(racks) / 小時(hr.)
最大洗滌高度	Loading height	450 mm
每篩耗水量	Rinse usage	2 L / 篩(rack)
外形尺寸	Size	1150 W x 695 D x 1913 H
機器淨重	Net weight	247 kg
機器安全自動感應	Auto door safety sensor	✓
自動能源節約系統	Auto energy saving system	✓
HACCP水溫警示	HACCP Temp. alert	✓
主洗水缸加熱功率	Wash tank heater	7.5 kW
主洗水泵功率	Wash pump power	1.5 kW (2 HP)
內置電熱水爐功率	Internal booster heater	36 kW
總耗電功率	Electrical loading	46 kW (70Amp)
供電要求	Power supply	380V/50Hz/3Phase(80 Amp)

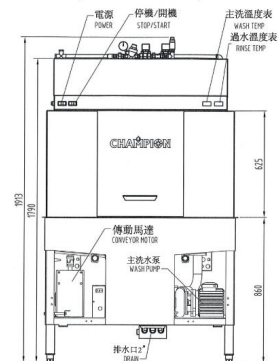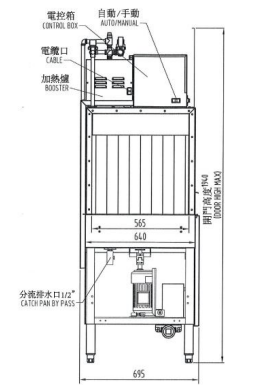

Characteristics 特點

環保節能設計 Energy saving design	→	節省金錢 Save money
全自動系統操作 Automatic system operation	→	簡單易用 Simple to use
高效能快速 High efficient operation	→	節省人手 Reduce labour cost
SUS 304 1.5mm 全不銹鋼結構 All stainless steel construction	→	堅固耐用 Durable and reduce down times
強力清洗及消毒效能 Powerful washing & sanitization	→	提高衛生形象 Sanitary image

Quality Assurance 信心保證

- CSA 認證 Certificate No: 2183621
- 歐盟認證 Certificate No: E1 031874 01
- 質量管理認證 **ISO 9001:2008** Certificate No: 02809Q10129ROS
- 香港政府食環署認可牌照 HKSAR FEHD Approved Certificate No: (5) in FEHD 7/NT 544/05

