

CHAMPION[®]

長龍式洗碗碟機系列
Flight Type Dishwasher Series

AS-F

商用節能型

Energy Saving

HACCP INTERNATIONAL
PROGRAMME
CERTIFICATION
HACCP Certified

Mechanical · Environmental · Professional






採用內凹式噴孔設計，防堵塞，加強清洗能力和擴闊噴洗範圍。
Debossed anti-clog nozzles provide powerful washing performance.



機頂，機身，及機門均為雙層不銹鋼板結構，保溫隔熱。
All stainless steel double wall construction of wash chambers and doors prevent heat loss.



360° 環繞高溫最後過水，全方位保證餐具衛生潔淨。
Surround rinse arms assure 360° coverage and complete sanitizing result.

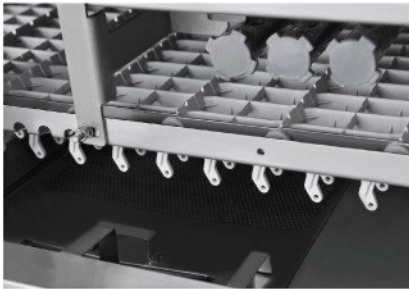

垃圾過濾籃易於拆卸及清洗。
Strainer pans and baskets are easy for removal and cleaning.



Characteristics 特點

環保節能設計

Energy saving design



節省金錢
Save money

全自動系統操作

Automatic system operation



簡單易用
Simple to use

高效能快速

High efficient operation



節省人手
Reduce labour cost

SUS 304 1.5mm 全不銹鋼結構

All SUS 304 1.5mm stainless steel construction



堅固耐用
Durable and reduce down times

強力清洗及消毒效能

Powerful washing & sanitization



提高衛生形象
Sanitary image

CHAMPION®

長龍式洗碗碟機系列 Flight Type Dishwasher Series

AS-F

洗碗碟機專家

The Dishwasher Experts



機頂式簡便控制箱，設於人體視線平行，便於操作和檢查。

Convenient control module with eye-level access lets operators verify proper operations and temperatures.



簡易“一按式”開關制置於出入口兩端，方便操作。

Simple control button located on both loading and unloading ends for ease of operations.



612mm 的傳送帶寬度增加了餐具的可清洗數量，實現了多樣化餐具/器皿的要求。
612mm wide conveyor belt increases ware washing volume and achieves versatility for higher productivity.



獨有紅外線感應自動節能系統，同時控制過水、水泵和烘乾程序。
Energy saving infrared sensor controls and activates rinse, pumps and dryer.

Quality Assurance 信心保證

- CSA 認證  Certificate No: 2183621
- 歐盟認證  Certificate No: E1 031874 01
- 質量管理認證 **ISO 9001:2000** Certificate: 02809Q10129ROS
- 香港政府食環署認可牌照 HKSAR Food and Environment Hygiene Dept. Approved Certificate (8) in FEHD 9/NT 544/09




AS-F 系列技術表 Series Data Sheet	推薦型號 Models	總長度 Total Length	進口	出口	預洗缸 Prewash		主洗缸 Wash			環繞噴淋 Surround Rinse	烘乾機 Dryer		
			L (mm)	A(mm)	Z(mm)	水泵 功率 Pump (kW)	水箱容量 Tank Volume (L)	水泵 功率 Pump (kW)	水箱容量 Tank Volume (L)	水箱加熱 器功率 Tank Heat (kW)	加熱器 功率 Booster (kW)	風機 功率 Blower (kW)	風量 Air Circulation (m ³ /hr.)
	1AR1	3,150	750	1,000			1.5	92	15	36/18			
	1AR2	3,450	750	1,300			1.5	92	15	36/18			
	2AR2	3,650	950	1,300			1.5	92	15	36/18			
	2AR3	3,950	950	1,600			1.5	92	15	36/18			
	1PAR1	3,950	750	1,000	1.5	92	1.5	92	15	36/18			
	1PAR2	4,250	750	1,300	1.5	92	1.5	92	15	36/18			
	2PAR2	4,450	950	1,300	1.5	92	1.5	92	15	36/18			
	2PAR3	4,750	950	1,600	1.5	92	1.5	92	15	36/18			
	2PAR4	5,050	950	1,900	1.5	92	1.5	92	15	36/18			
	1PARD1	4,750	750	1,000	1.5	92	1.5	92	15	36/18	0.75	3200	10
	1PARD2	5,050	750	1,300	1.5	92	1.5	92	15	36/18	0.75	3200	10
	2PARD2	5,250	950	1,300	1.5	92	1.5	92	15	36/18	0.75	3200	10
	2PARD3	5,550	950	1,600	1.5	92	1.5	92	15	36/18	0.75	3200	10
	2PARD4	5,850	950	1,900	1.5	92	1.5	92	15	36/18	0.75	3200	10
	1PBRD1	5,550	750	1,000	1.5	92	1.5+1.5	92+92	15+15	36/18	0.75	3200	10
	1PBRD2	5,850	750	1,300	1.5	92	1.5+1.5	92+92	15+15	36/18	0.75	3200	10
	2PBRD2	6,050	950	1,300	1.5	92	1.5+1.5	92+92	15+15	36/18	0.75	3200	10
	2PBRD3	6,350	950	1,600	1.5	92	1.5+1.5	92+92	15+15	36/18	0.75	3200	10
	2PBRD4	6,650	950	1,900	1.5	92	1.5+1.5	92+92	15+15	36/18	0.75	3200	10

不斷改進產品是我們既定的公司政策，參數如有變更，恕不另行通知。As product improvement is an on-going policy of Global-Champion, we reserve the right to technical or design modification without notice.

技術規格 Technical Data

標準機身外圍寬度	Standard machine width	914mm
標準傳送帶寬度	Standard conveyor width	612mm
標準洗滌高度	Standard loading height	450mm
傳送速度	Conveyor speed	1.6m/min. - 3.0m/min.
傳送馬達功率	Conveyor motor	0.2kW
洗滌水泵功率	Wash pump motor	1.5kW(2HP)
最大耗水量	Max. water flow	360 L/hr.
自動進水	Auto fill	✓
紅外線節能系統	Energy saving infrared sensor	✓
機門安全自動感應	Auto door safety sensor	✓

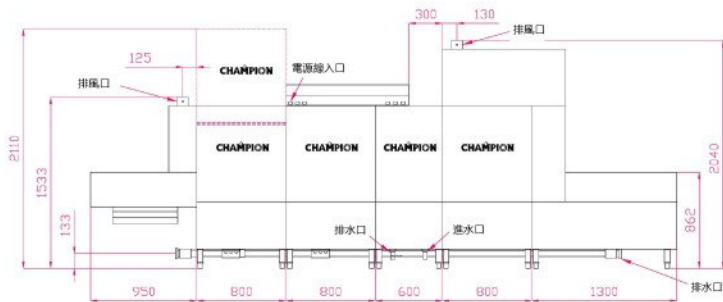

可根據特殊需求，特別訂造加高或加闊型。
Higher or wider models can be special tailor made according to particular needs.

卓滙機械香港有限公司
Champion Machinery (HK) Ltd.

卓滙化工有限公司
Champion Chemicals Ltd.

Tel : 852 - 2475 9875

Fax : 852 - 2443 1096

Email : sales@champion-chem.com

Website : www.champion-chem.com